

# Heated Holding Cabinets

HCH-930 Three-drawer countertop, humidified

HCD-930 Three-drawer countertop, dry

HCH-932 Two-drawer countertop, humidified

HCD-932 Two-drawer countertop, dry

*At right: HCH-930 with electro-mechanical controls*

*Heated Holding Cabinets keep foods hot and tasty for long periods of time before serving. Space-saving countertop drawer models provide separate environments to keep popular items handy for immediate service.*



## Description

Compact two and three drawer countertop heated holding cabinets help keep popular hot menu items available for quick, immediate service.

## Configuration

- Both two and three drawer models are available as humidified (HCH) or dry (HCD) units.
- Dry units may be ordered with electro-mechanical controls or with countdown timer control module.
- Dry units come with recessed drawer handles.
- Humidified units are available with electro-mechanical controls, only.
- Drawer handles are not recessed.
- All units are shipped with wire basket drawer inserts and crumb/drip tray.
- North American models and most CE models include power cord.
- Humidified models include ½ in. o.d. water line fitting.

## Main Features

- Countdown timers (dry units, only) with single switch start/stop/abort, manual override and power out memory.
- Six countdown timers with HC-930.
- Four countdown timers with HC-932.
- Electro-mechanical controls feature:
  - Adjustable thermostat.
  - Automatic water level control.
  - Power, water, and heat indicator lights.
- Humidified or dry operation.
- Auto-fill water supply in humidified units.
- Wire basket inserts allow even, convection airflow.
- Fully insulated cabinet.
- Snug-fitting drawers on low-friction bearings.
- Single piece welded drawer and liner.
- Positive drawer closure.
- High temperature drawer gasket.
- Vinyl insulated drawer handles.
- Crumb/drip tray for easy cleanup.



*HCD-932 with countdown timer module and recessed drawer handles.*

- Energy efficient operation.
- Welded stainless steel construction throughout.
- Adjustable leveling feet.

## Henny Penny Corporation

P.O. Box 60  
Eaton, OH 45320

+1 937 456.8400  
+1 937 456.8402 Fax


**Toll free in USA**  
**800 417.8417**  
**800 417.8402 Fax**

[www.hennypenny.com](http://www.hennypenny.com)


# HCH-930 HCD-930 HCH-932 HCD-932 Specifications

## Dimensions

### HCH-930 and HCD-930

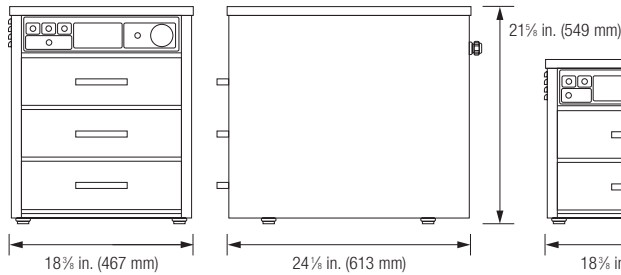

### HCH-932 and HCD-932

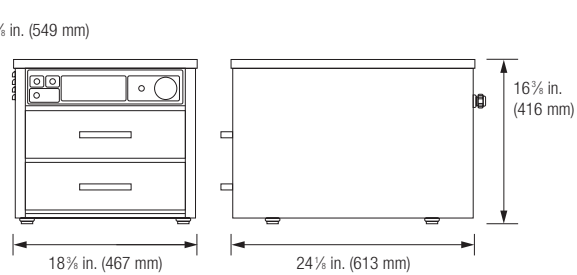

#### NOTE:

Add 1 1/2 in. (38 mm) for protruding door handles.  
Add 1 in. (25 mm) for rear electrical cord.  
Add 2 in. (51 mm) for rear water line fitting on humidified unit.

## Clearances

No additional required clearances.

### HCH-930 and HCD-930

3 wire basket drawer inserts (included)  
11 3/4 in. x 19 1/4 in. x 1 5/8 in. (298 x 489 x 41 mm)

160-210°F (71-99°C)

Auto-fill water pan, 1/4 in. o.d. water line connection  
(HCH models only)

133 lb. (55.3 kg)

UL, UL Sanitation, CUL, CE

Voltage	Phase	Cycle/Hz	KW	Amps
120	1	50/60	.842	7.0
230	1	50/60	.770	3.3
240	1	50/60	.842	3.5

### HCH-932 and HCD-932

2 wire basket drawer inserts (included)  
11 3/4 in. x 19 1/4 in. x 1 5/8 in. (298 x 489 x 41 mm)

160-210°F (71-99°C)

Auto-fill water pan, 1/4 in. o.d. water line connection  
(HCH models only)

118 lb. (53.6 kg)

UL, UL Sanitation, CUL, CE

Voltage	Phase	Cycle/Hz	KW	Amps
120	1	50/60	.842	7.0
230	1	50/60	.770	3.3
240	1	50/60	.842	3.5

Specifications subject to change without notice.  
For up to date product information please visit  
[hennypenny.com](http://hennypenny.com)

## Order from:

All international voltages available.

USA/Canada 120v units shipped with power cord and grounded plug. CE units shipped with power cord only.

Non-CE HCH-930 ships with power cord, only.

Non-CE HCD-932 ships with power cord and plug.

Non-CE HCH-932 does NOT include power cord or plug.

240V HCD-932 (only) ships with IEC IP 67 plug.

#### Plug Types – 120v units



NEMA 5-15P



5-15P

Manufactured by:

**Henny Penny Corporation**

P.O. Box 60  
Eaton, OH 45320