

Heated Holding Cabinets

HHC-900 Full-Size

At right:
HHC-900 CDT with 13 Count Down Timer
control module

Far right:
HHC-900 with electro-mechanical
controls, right hinged doors, pass thru
cabinet design.

Heated Holding Cabinets keep foods hot and tasty for long periods of time before serving. The right holding cabinet can make the difference between what you sell and what you throw away.



Description

Full size, high volume, mobile heated holding cabinet with twin cabinets and single control panel. Designed to hold foods within proper temperature ranges prior to serving.

Configuration

The HHC-900 is available in two basic versions:

- Standard heated holding cabinet.
- Adjustable humidity holding cabinet.

The HHC-900 can be equipped with electro-mechanical controls or CDT Count Down Timer module (not available with adjustable humidity version.) Both versions may be ordered in any of the following configurations:

- Pass thru or solid back cabinet design.
- Right or left hinged doors.
- Stainless steel or glass doors.

Main Features

- Electro-mechanical controls feature thermostatic control, dial thermometer, on/off and cycle temperature lights.
- Count down timer module features 13 independent programmable timers with:
 - Single switch start/stop/abort, manual override and power-out memory.
 - Constant digital temperature display.
 - Separate operating time and temperature set points.
 - Sound alert signal.
- Removable air ducts for easy cleaning.
- Front panel adjustable humidity control (adjustable humidity units, only).
- Dual heavy duty blower motors.
- Ventilated side racks.
- Optional large stainless steel water pan.
- Partial pan removal for convenient loading and unloading.
- Fully insulated doors, sidewalls and control module.
- Full perimeter door gasket.
- Self-closing, lift-off doors stay open past 90 degrees.
- Magnetic door latch and heavy-duty plated hinges.
- Standard 5 in. (127 mm) casters, two locking.

Henny Penny Corporation

P.O. Box 60
Eaton, OH 45320



+1 937 456.8400
+1 937 456.8402 Fax

Toll free in USA
800 417.8417
800 417.8402 Fax

www.hennypenny.com

HHC-900 Specifications

Dimensions

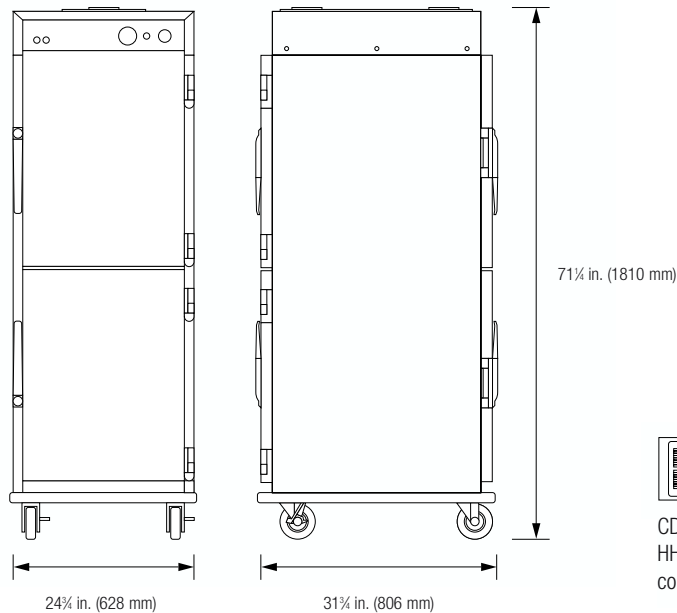

CDT Control Module for the HHC-900 features 13 individual count down timers.

Capacity

HHC-900

13 bun/sheet pans 18 x 26 in. (145 mm x 660 mm) with 3/4 in. (95 mm) spacing.

With adjustable humidity

8 bun/sheet pans with 5/2 in. (140 mm) spacing in top 4 shelves and 7/4 in. (184 mm) spacing in bottom 4 shelves.

Heating

160-210°F (71-99°C)

160-210°F (71-99°C)

Water

One gallon water pan

One gallon water pan, 8 ft.(2.4 m) Nylabraid water tube with 3/8 in. water connection.

Shipping Weight

372 lbs. (169 kg)

372 lbs. (169 kg)

Listings

UL, NSF, CUL, CE

UL, NSF

Electrical

Control	Voltage	Phase	Cycle/Hz	KW
EM	100	1	50/60	2.1
	120	1	50/60	2.1
	240	1	50/60	2.1
	240	1	50/60	3.1
CDT	120	1	50/60	2.1
	208	1	50/60	2.1
	230	1	50	1.9
	240	1	50/60	2.1
	240	1	50/60	3.1

Voltage	Phase	Cycle/Hz	KW
120	1	60	1.94

All international voltages available

Specifications subject to change without notice

Order from:

Manufactured by:

Henny Penny Corporation

P.O. Box 60
Eaton, OH 45320