

**NEW!**

**HENNY PENNY™**  
Global Foodservice Solutions

# SmartHold™ Holding Cabinets

HHC-993 Half Size  
HHC-992 Stacked

**SmartHold™** Humidified Heated Holding Cabinets offer extraordinary control of humidity levels, giving foodservice operators higher food quality, less waste and the ability to proof and hold in the same cabinet!

## Description

Half-size, mobile, humidified holding cabinet designed to hold a wide range of foods within ideal temperature and humidity conditions prior to serving. Features automatic humidity control in one-percent increments from 10 to 90% relative humidity.

## Configuration

The HHC-993 has five shelf runners. Please specify:

- Pass-through design or solid back.
- Right or left-hand hinged doors.
- 5 countdown timers.

The HHC-992 is formed by stacking two HHC-993 half-size units. Note that both cabinets forming the stacked unit will be identical with regard to above specifications. Unit is completely assembled at the factory.



## Main Features

- Patented closed loop humidity control:
  - Enter humidity OFF or ON and any level between 1 and 90% RH.
  - Heated water pan.
  - Continuous convection.
  - Exclusive automatic venting.
  - Self-diagnostic for vent motor, temperature sensor and water pan heater operation.
  - Easy to clean components.
- Electronic touch pad control module:
  - Five count down programmable timers with single switch start/stop/abort, manual override and power-out memory.
  - Constant digital humidity/temperature display.
  - Separate humidity/temperature set points.
  - Low water warning notification.
  - Sound alert signal.
  - Food probe temperature display.
- Large 3-gallon (11.4 liters) stainless steel water pan recessed into bottom of unit.
- Proofing mode standard on all units.
- Optional food probe helps verify precise core food temperatures.
- Partial pan removal for convenient loading and unloading.
- Fully insulated doors, sidewalls and control module.
- Full perimeter door gasket.
- Self-closing, lift-off doors stay open past 90 degrees.
- Magnetic door latch and heavy-duty plated hinges.
- Standard 5 in. (127 mm) casters, two locking.
- All components are easily serviceable.
- Patented quick response humidity generation system.
- Optional hose drain connection available separately.

*SmartHold Holding Cabinets feature precise, automatic humidity control to create the ideal holding environment for any foods.*

**Henny Penny Corporation**  
P.O. Box 60  
Eaton, OH 45320

+1 937 456.8400  
+1 937 456.8402 Fax

**Toll free in USA**  
**800 417.8417**  
**800 417.8402 Fax**

[www.hennypenny.com](http://www.hennypenny.com)

# HHC-992 HHC-993 Specifications

## Dimensions

## Capacity

## Heating

## Humidity


## Water

## Shipping Weight

## Listings

## Electrical

### HHC-993

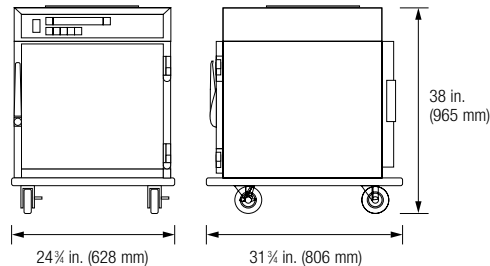

### HHC-993 Half Size

Accepts standard sheet pans 18 x 26 in. (145 x 660 mm)  
5 pans on 3 3/4 in. (95 mm) centers

Proofing mode: 80-140°F (27-60°C)  
Normal holding: 160-210°F (71-99°C)


OFF/ON 10-90% RH

3 gallon (11.4 liters) water pan; 2 gallons (7.6 liters) for operational use, external drain connection

220 lbs. (100 kg)

UL, UL Sanitation, CUL, CE Pending

### HHC-992

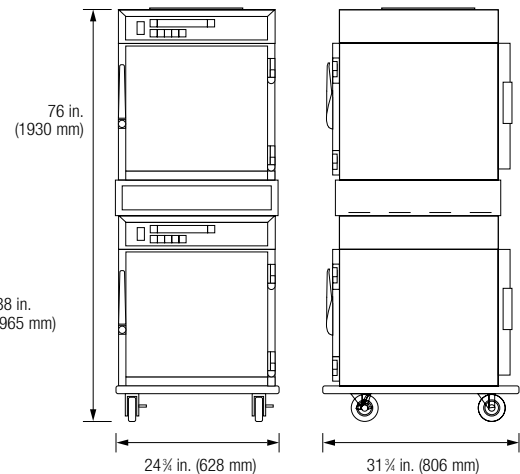

### HHC-992 Stacked

Accepts standard sheet pans 18 x 26 in. (145 x 660 mm)  
10 pans on 3 3/4 in. (95 mm) centers

Proofing mode: 80-140°F (27-60°C)  
Normal holding: 160-210°F (71-99°C)

OFF/ON 10-90% RH

3 gallon (11.4 liters) water pan; 2 gallons (7.6 liters) for operational use, external drain connection in each cabinet

493 lbs. (224 kg)

UL, UL Sanitation, CUL, CE Pending

HHC-993/HHC-992 per cabinet				
Voltage	Phase	Cycle/Hz	KW	Amps
120	1	50/60	2.3	18.9
208	1	50/60	2.3	10.9
240	1	50/60	2.3	9.4
All international voltages available.				
Plug type:				
NEMA 5-20P	NEMA 5-30P	NEMA 6-15P		
Optional power cord and plug can be supplied for domestic units only.				

Each cabinet in the HHC-992 operates independently.  
Electrical specifications at left apply per cabinet.

Specifications subject to change without notice

## Order from:

Manufactured by:

**Henny Penny Corporation**  
P.O. Box 60  
Eaton, OH 45320